

Thread shank adapter

Application: For clamping threaded shank end mill bodies.

Technical Design: Runout of outer taper to $D_1 \leq 0,005$ mm.



Fine balanced
 $G 2,5$ at 25.000^{rpm}
or max. residual imbalance
 ≤ 1 gmm

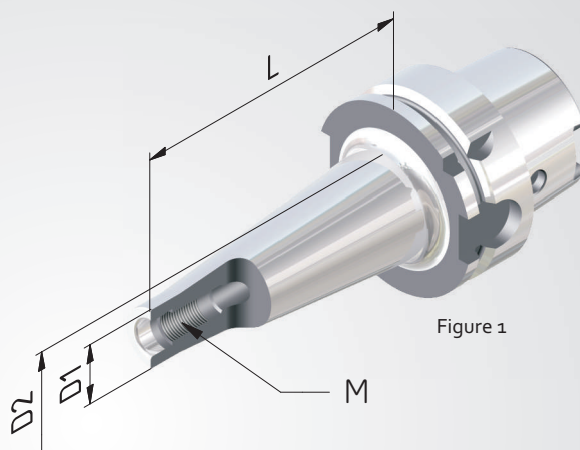


Figure 1

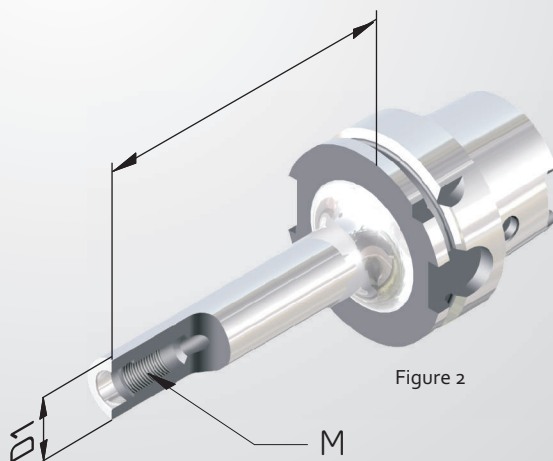


Figure 2

Order No.	HSK	M	L	D ₁	D ₂
-----------	-----	---	---	----------------	----------------

Conical (Figure 1)

606308-01	63	M8	25	13	15
606308-02	63	M8	50	13	23
606308-03	63	M8	75	13	25
606308-04	63	M8	100	13	30
606310-01	63	M10	25	18	23
606310-02	63	M10	50	18	25
606310-03	63	M10	75	18	30
606310-04	63	M10	100	18	35
606310-06	63	M10	150	18	45
606312-01	63	M12	25	21	24
606312-02	63	M12	50	21	30
606312-03	63	M12	75	21	35
606312-04	63	M12	100	21	38
606312-06	63	M12	150	21	45
606316-01	63	M16	25	29	29
606316-02	63	M16	50	29	34
606316-03	63	M16	75	29	35
606316-04	63	M16	100	29	40
606316-06	63	M16	150	29	48

Cylindrical (Figure 2)

6063057-01	63	M5	25	10	
6063067-01	63	M6	25	10	
6063087-01	63	M8	25	13	
6063087-02	63	M8	50	13	
6063087-03	63	M8	75	13	
6063087-04	63	M8	100	13	
6063107-01	63	M10	25	18	
6063107-02	63	M10	50	18	
6063107-03	63	M10	75	18	
6063107-04	63	M10	100	18	
6063107-06	63	M10	150	18	
6063127-01	63	M12	25	21	
6063127-02	63	M12	50	21	
6063127-03	63	M12	75	21	
6063127-04	63	M12	100	21	
6063127-06	63	M12	150	21	
6063167-01	63	M16	25	29	
6063167-02	63	M16	50	29	
6063167-03	63	M16	75	29	
6063167-04	63	M16	100	29	
6063167-06	63	M16	150	29	