


## Slim endmill holder Weldon

- Application:** For clamping tools with cylindrical shank according to DIN 1835 B and E.
- Technical Design:** Runout of outer taper to  $D_1 \leq 0,003$  mm. Tolerance of bore H4 (more accurate as DIN).
- Includes:** Special clamping screw (with ball head) and set screw.
- Accessories:** See page 132.

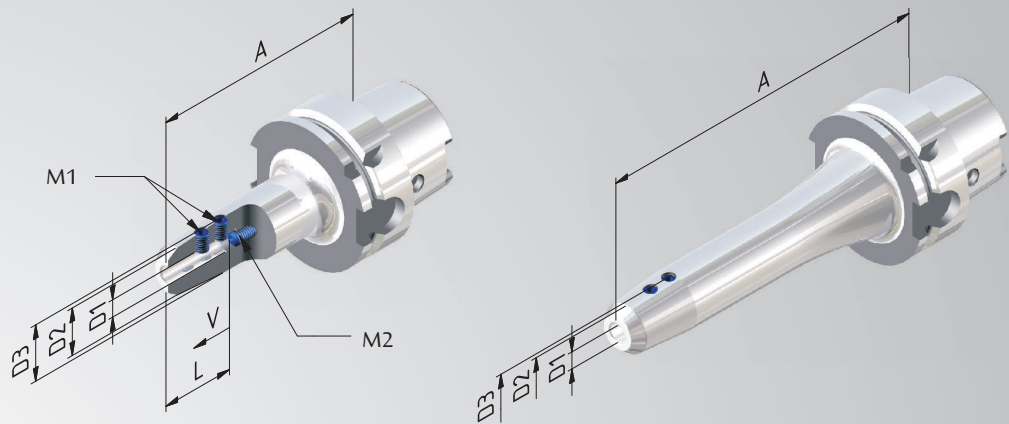

Order No.	HSK	D1	A	D2	D3	L	M1	M2
LONG								
606327-01	63	6	100	13	24	36,5	M6	M6
606327-03	63	8	100	15	26	36,5	M6	M6
606327-05	63	10	100	16	28	40,5	M6	M8x1
606327-07	63	12	120	17	29	45,5	M6	M10x1
606327-09	63	14	120	19	32	45,5	M8	M10x1
606327-11	63	16	120	21	34	48,5	M8	M12x1
606327-13	63	18	120	23	36	48,5	M8	M12x1
606327-15	63	20	120	25	38	50,5	M8	M16x1

= 160

606327-02	63	6	160	13	24	36,5	M6	M5
606327-04	63	8	160	15	26	36,5	M6	M6
606327-06	63	10	160	16	28	40,5	M6	M8x1
606327-08	63	12	160	17	29	45,5	M6	M10x1
606327-10	63	14	160	19	32	45,5	M8	M10x1
606327-12	63	16	160	21	34	48,5	M8	M12x1
606327-14	63	18	160	23	36	48,5	M8	M12x1
606327-16	63	20	160	25	38	50,5	M8	M16x1