


Endmill holder Weldon

- Application:** For clamping tools with cylindrical shank according to DIN 1835 B.
- Technical Design:** Runout of outer taper to $D_1 \leq 0,003$ mm. Tolerance of bore H4 (more accurate as DIN).
- Includes:** Clamping screw.
- Accessories:** See page 132.



Fine balanced
G 2,5 at 25.000^{rpm}
or max. residual imbalance
≤ 1 gmm

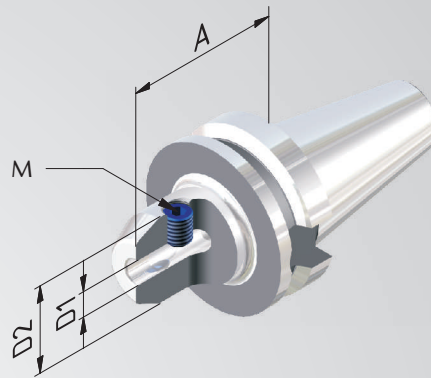

Order No.	BT	D1	A	D2	L	M
SHORT						
754004-01	40	6	50	25	35	M6
754004-02	40	8	50	28	35	M8
754004-03	40	10	63	35	41	M10
754004-04	40	12	63	42	48	M12
754004-05	40	14	63	42	48	M12
754004-06	40	16	63	48	51	M14
754004-07	40	18	63	48	51	M14
754004-08	40	20	63	52	53	M16
754004-09	40	25	90	65	60	M18x2
754004-10	40	32	100	72	64	M20x2
= 100						
754004-31	40	6	100	25	35	M6
754004-32	40	8	100	28	35	M8
754004-33	40	10	100	35	41	M10
754004-34	40	12	100	42	48	M12
754004-36	40	16	100	48	51	M14
754004-38	40	20	100	52	53	M16