


Shrink fit holder »Cool Tool« 4,5 °

- Application:** Particularly suitable for tools without internal coolant, and for machining at difficult positions with bad chip removal.
- Technical Design:** Two holes in the toolholder lead the coolant directly to the cutting edge. Coolant holes can be re-sealed with screws for the use of tools with internal coolant holes.
- Includes:** Set screw and 2 x M3 screws to plug the coolant holes if needed.
- Accessories:** See page 132.



Fine balanced
G 2,5 at 25.000^{min}
or max. residual imbalance
≤ 1 gmm

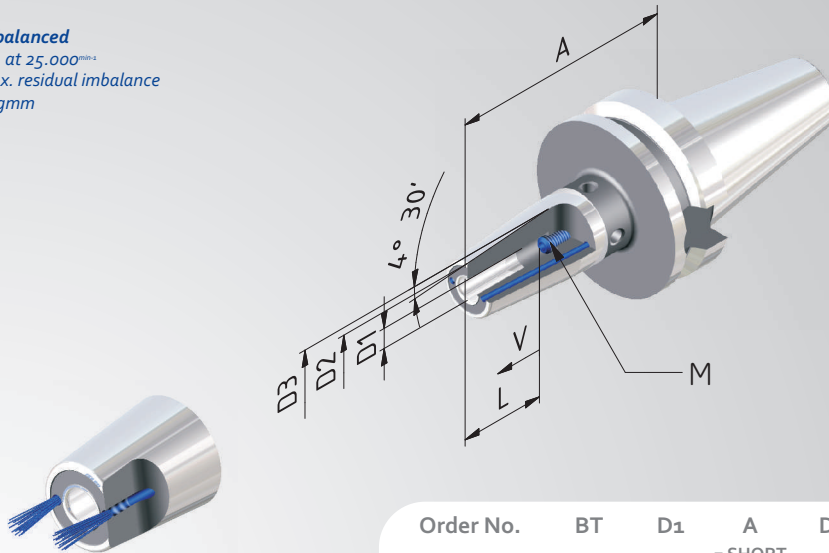

| Order No. | BT | D1 | A | D2 | D3 | V | L | M | |
|------------|----|----|---------|----|----|----|----|-------|--|
| | | | = SHORT | | | | | | |
| 754021-019 | 40 | 6 | 90 | 21 | 27 | 10 | 37 | M5 | |
| 754021-029 | 40 | 8 | 90 | 21 | 27 | 10 | 37 | M6 | |
| 754021-039 | 40 | 10 | 90 | 24 | 32 | 10 | 42 | M8x1 | |
| 754021-049 | 40 | 12 | 90 | 24 | 32 | 10 | 48 | M10x1 | |
| 754021-059 | 40 | 14 | 90 | 27 | 34 | 10 | 48 | M10x1 | |
| 754021-069 | 40 | 16 | 90 | 27 | 34 | 10 | 51 | M12x1 | |
| 754021-079 | 40 | 18 | 90 | 33 | 42 | 10 | 51 | M12x1 | |
| 754021-089 | 40 | 20 | 90 | 33 | 42 | 10 | 53 | M16x1 | |
| 754021-099 | 40 | 25 | 100 | 44 | 53 | 10 | 59 | M16x1 | |
| | | | = 130 | | | | | | |
| 754021-519 | 40 | 6 | 130 | 21 | 27 | 10 | 37 | M5 | |
| 754021-529 | 40 | 8 | 130 | 21 | 27 | 10 | 37 | M6 | |
| 754021-539 | 40 | 10 | 130 | 24 | 32 | 10 | 42 | M8x1 | |
| 754021-549 | 40 | 12 | 130 | 24 | 32 | 10 | 48 | M10x1 | |
| 754021-559 | 40 | 14 | 130 | 27 | 34 | 10 | 48 | M10x1 | |
| 754021-569 | 40 | 16 | 130 | 27 | 34 | 10 | 51 | M12x1 | |
| 754021-579 | 40 | 18 | 130 | 33 | 42 | 10 | 51 | M12x1 | |
| 754021-589 | 40 | 20 | 130 | 33 | 42 | 10 | 53 | M16x1 | |