


Endmill holder Weldon

- Application:** For clamping tools with cylindrical shank according to DIN 1835 B.
- Technical Design:** Runout of outer taper to $D_1 \leq 0,003$ mm. Tolerance of bore H4 (more accurate as DIN).
- Includes:** Clamping screw.
- Accessories:** See page 132.



Fine balanced
G 2,5 at 25.000^{rpm}
or max. residual imbalance
≤ 1 gmm

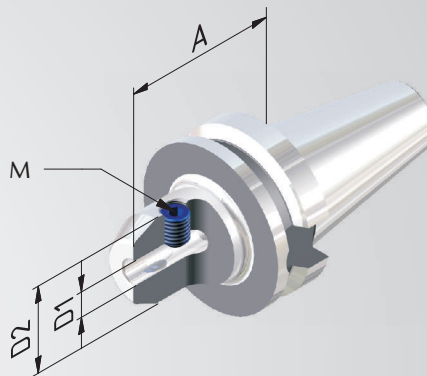

Order No.	BT	D1	A	D2	L	M
755004-01	50	6	63	25	35	M6
755004-02	50	8	63	28	35	M8
755004-03	50	10	70	35	41	M10
755004-04	50	12	80	42	48	M12
755004-06	50	16	80	48	51	M14
755004-08	50	20	80	52	53	M16
755004-09	50	25	100	65	60	M18x2
755004-10	50	32	105	72	64	M20x2