

Endmill holder Whistle Notch

Application: For clamping tools with cylindrical shank according to DIN 1835 E.


Technical Design: Runout of outer taper to $D_1 \leq 0,003$ mm. Tolerance of bore H4 (more accurate as DIN).

Includes: Clamping screw and set screw.

Accessories: See page 133.



Balanced
G 6,3 at 8.000^{mm/s}

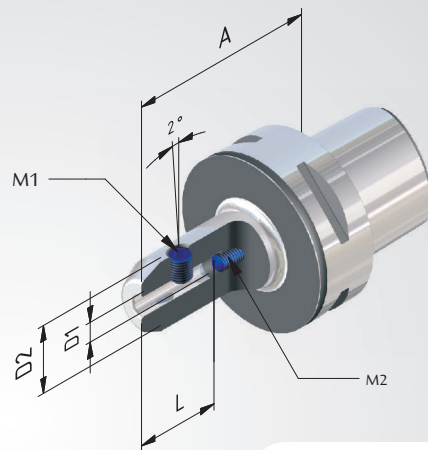

Order No.	C	D	A SHORT	D2	L	M1	M2
306309-01	6	6	75	25	36,5	M6	M5
306309-02	6	8	75	28	36,5	M8	M6
306309-03	6	10	75	35	40,5	M10	M8
306309-04	6	12	80	42	45,5	M12	M10
306309-05	6	14	80	44	45,5	M12	M10
306309-06	6	16	80	49	48,5	M14	M12
306309-07	6	18	80	50	48,5	M14	M12
306309-08	6	20	85	52	50,5	M16	M16
306309-09	6	25	90	65	56,5	M18x2	M20
306309-10	6	32	95	72	60,5	M20x2	M20