

Collet chuck ER

Application: For clamping tools with cylindrical shank in collets ER


Technical Design: Runout of outer taper to inner taper. Due to adjusted taper tolerances of the ER-Inner taper and the Collet taper max. runout of $\leq 8\mu$ at $2,5 \times D$.

Includes: Clamping nut.

Accessories: See page 128.



Fine balanced
G 2,5 at 25.000^{min}
or max. residual imbalance
 ≤ 1 gmm

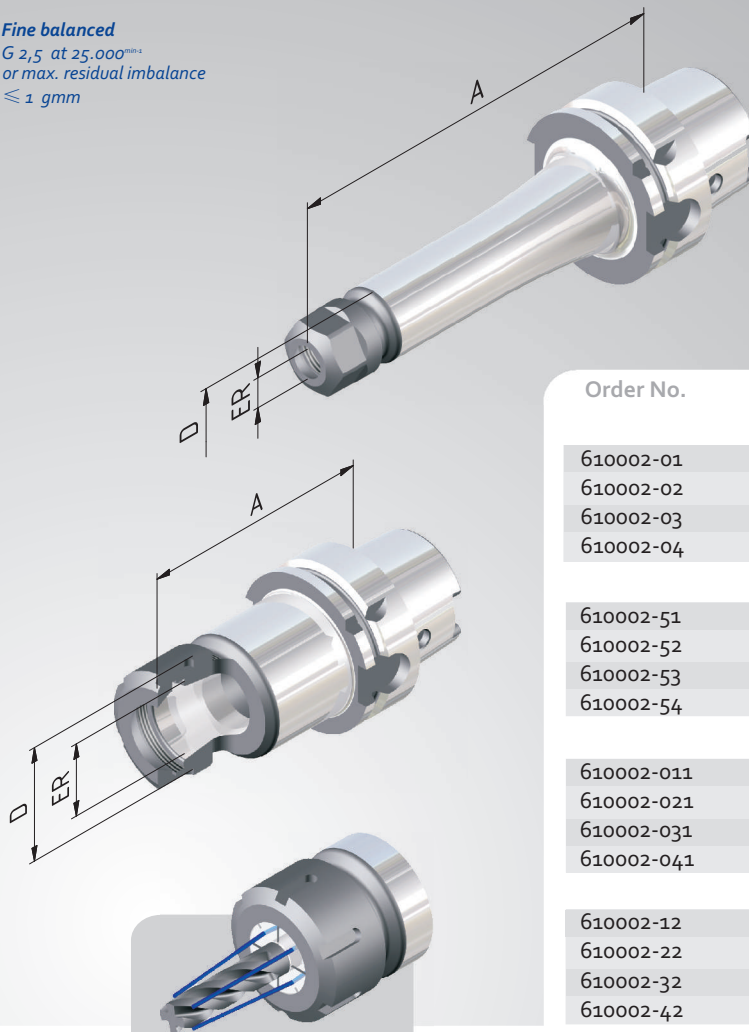

Order No.	HSK	ER	Clamping Range	A	D
SHORT					
610002-01	100	16	1-10	100	28
610002-02	100	25	1-16	100	42
610002-03	100	32	2-20	100	50
610002-04	100	40	4-26	120	63
= 130					
610002-51	100	16	1-10	130	28
610002-52	100	25	1-16	130	42
610002-53	100	32	2-20	130	50
610002-54	100	40	4-26	130	63
= 160					
610002-011	100	16	1-10	160	28
610002-021	100	25	1-16	160	42
610002-031	100	32	2-20	160	50
610002-041	100	40	4-26	160	63
= 200					
610002-12	100	16	1-10	200	28
610002-22	100	25	1-16	200	42
610002-32	100	32	2-20	200	50
610002-42	100	40	4-26	200	63

Sealed versions see
pages 130, 131.