

Combi shell mill holder

Application: For adapting shell mills with transverse and longitudinal groove.



Technical Design: Runout of outer taper to $D_1 \leq 0,006$ mm.

Includes: Clamping screw, drive key and adjusting spring.

Accessories: See page 135.



Fine balanced
 $G_{2,5}$ at 25.000^{rpm}
or max. residual imbalance
 ≤ 1 gmm

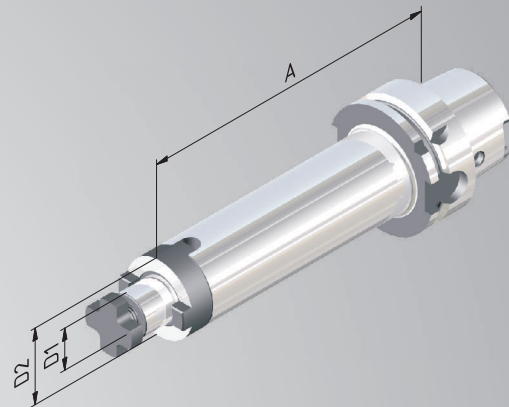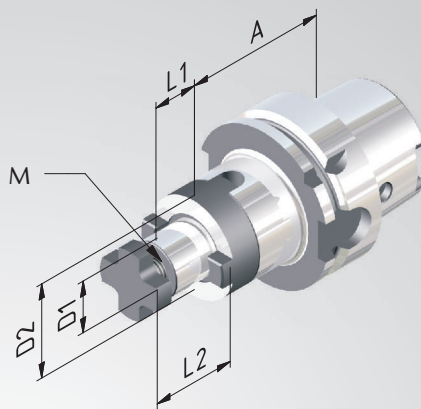

Order No.	HSK	D1	A	D2	l1	l2	M
SHORT							
610006-01	100	16	60	32	17	27	M8
610006-02	100	22	60	40	19	31	M10
610006-03	100	27	60	48	21	33	M12
610006-04	100	32	60	58	24	38	M16
610006-05	100	40	70	70	27	41	M20
= 100							
610006-011	100	16	100	32	17	27	M8
610006-021	100	22	100	40	19	31	M10
610006-031	100	27	100	48	21	33	M12
610006-041	100	32	100	58	24	38	M16
610006-051	100	40	100	70	27	41	M20
= 160							
610006-61	100	16	160	32	17	27	M8
610006-62	100	22	160	40	19	31	M10
610006-63	100	27	160	48	21	33	M12
610006-64	100	32	160	58	24	38	M16
610006-65	100	40	160	70	27	41	M20