


Shrink fit holder 3°

Application: For clamping tools with cylindrical shank of solid carbide or HSS, tol. h6.

Technical Design: Made of special heat resistant steel. Suitable for inductive shrinking unit. Runout of outer taper to $D_1 \leq 0,003$ mm.



Fine balanced
G 2,5 at 40.000^{rpm}

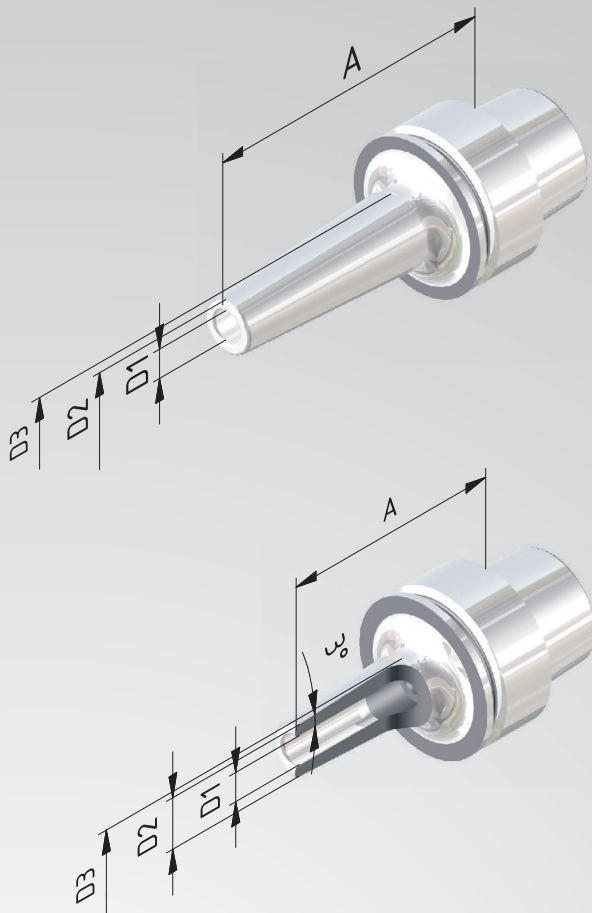

Order No.	HSK	D1	A	D2	D3
	40		= 60		

404051-13	40	3	60	9	14
404051-14	40	4	60	10	15
404051-15	40	5	60	11	16
404051-01	40	6	60	12	17
404051-02	40	8	60	14	19
404051-03	40	10	60	16	21
404051-04	40	12	60	18	23

= 70

404051-313	40	3	70	9	15
404051-314	40	4	70	10	16
404051-315	40	5	70	11	17
404051-31	40	6	70	12	18
404051-32	40	8	70	14	20
404051-33	40	10	70	16	22
404051-34	40	12	70	18	24

= 80

404051-513	40	3	80	9	16
404051-514	40	4	80	10	17
404051-515	40	5	80	11	18
404051-51	40	6	80	12	19
404051-52	40	8	80	14	21
404051-53	40	10	80	16	23
404051-54	40	12	80	18	25

EXTRA SLIM

= 60

404052-13	40	3	60	6	10
404052-14	40	4	60	7	11
404052-15	40	5	60	8	12
404052-01	40	6	60	9	13
404052-02	40	8	60	11	15
404052-03	40	10	60	13	17
404052-04	40	12	60	15	19


Shrink fit holder 3°

Application: For clamping tools with cylindrical shank of solid carbide or HSS, tol. h6.

Technical Design: Made of special heat resistant steel. Suitable for inductive shrinking unit. Runout of outer taper to $D_1 \leq 0,003$ mm.



Fine balanced
G 2,5 at 40.000^{rpm}

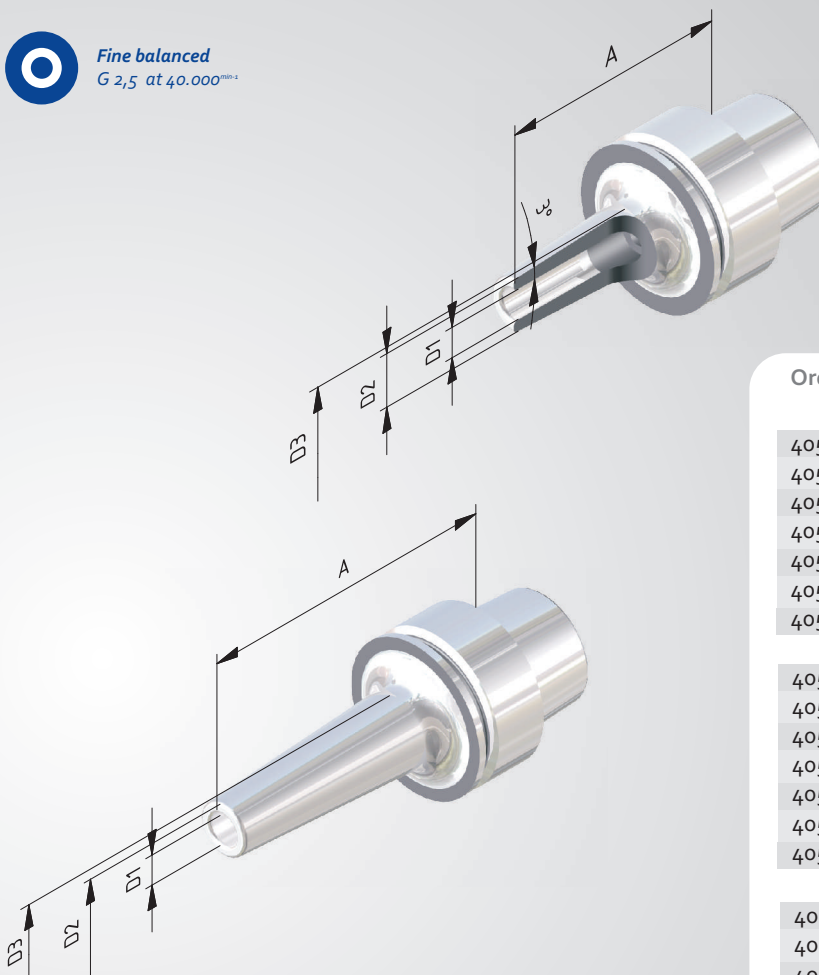

Order No.	HSK	D1	A	D2	D3
	50		= 70		
405051-13	50	3	70	9	14
405051-14	50	4	70	10	15
405051-15	50	5	70	11	16
405051-01	50	6	70	12	17
405051-02	50	8	70	14	19
405051-03	50	10	70	16	21
405051-04	50	12	70	18	23
			= 80		
405051-313	50	3	80	9	15
405051-314	50	4	80	10	16
405051-315	50	5	80	11	17
405051-31	50	6	80	12	18
405051-32	50	8	80	14	20
405051-33	50	10	80	16	22
405051-34	50	12	80	18	24
			= 100		
405051-513	50	3	100	9	17
405051-514	50	4	100	10	18
405051-515	50	5	100	11	19
405051-51	50	6	100	12	20
405051-52	50	8	100	14	22
405051-53	50	10	100	16	24
405051-54	50	12	100	18	26