

## Combi shell mill holder

**Application:** For adapting shell mills with transverse and longitudinal groove.



**Technical Design:** Runout of outer taper to  $D_1 \leq 0,006$  mm.

**Includes:** Clamping screw, drive keys and adjusting spring.

**Accessories:** See from page 135.



*Fine balanced*  
 $G 2,5$  at  $25.000 \text{ min}^{-1}$   
or max. residual imbalance  
 $\leq 1 \text{ gmm}$

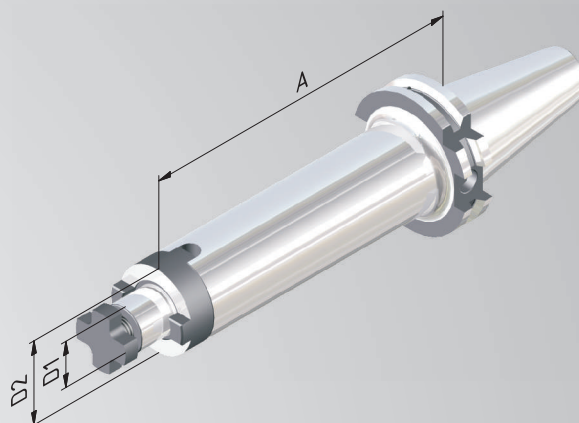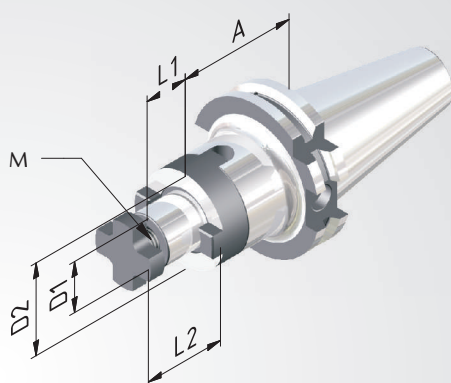

| Order No. | SK | D1 | A | D2 | l1 | l2 | M |
|-----------|----|----|---|----|----|----|---|
|-----------|----|----|---|----|----|----|---|

SHORT

|           |    |    |    |    |    |    |     |
|-----------|----|----|----|----|----|----|-----|
| 714006-01 | 40 | 16 | 55 | 32 | 17 | 27 | M8  |
| 714006-02 | 40 | 22 | 55 | 40 | 19 | 31 | M10 |
| 714006-03 | 40 | 27 | 55 | 48 | 21 | 33 | M12 |
| 714006-04 | 40 | 32 | 60 | 58 | 24 | 38 | M16 |

= 100

|           |    |    |     |    |    |    |     |
|-----------|----|----|-----|----|----|----|-----|
| 714006-31 | 40 | 16 | 100 | 32 | 17 | 27 | M8  |
| 714006-32 | 40 | 22 | 100 | 40 | 19 | 31 | M10 |
| 714006-33 | 40 | 27 | 100 | 48 | 21 | 33 | M12 |
| 714006-34 | 40 | 32 | 100 | 58 | 24 | 38 | M16 |

= 160

|           |    |    |     |    |    |    |     |
|-----------|----|----|-----|----|----|----|-----|
| 714006-61 | 40 | 16 | 160 | 32 | 17 | 27 | M8  |
| 714006-62 | 40 | 22 | 160 | 40 | 19 | 31 | M10 |
| 714006-63 | 40 | 27 | 160 | 48 | 21 | 33 | M12 |
| 714006-64 | 40 | 32 | 160 | 58 | 24 | 38 | M16 |