


Short drill chuck

Application: For clamping tools with cylindrical shank. Also suitable for tools with internal coolant.

Technical Design: Wrench.



Balanced
G 6,3 at 8.000^{mm-1}

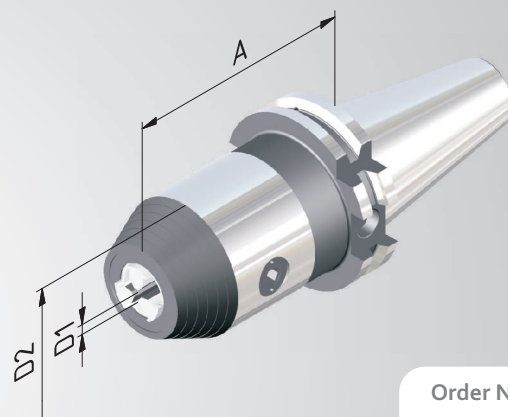

Order No.	SK	Clamping range D1	A	D2
FORM A without internal coolant				
714095-01	40	1-13	81	45
714095-02	40	1-16	87	56
FORM AD for tools with internal coolant				
714095-31	40	1-13	81	45
714095-32	40	1-16	87	56