


Slim endmill holder Weldon

- Application:** For clamping tools with cylindrical shank according to DIN 1835 B and E.
- Technical Design:** Runout of outer taper to $D_1 \leq 0,003$ mm. Tolerance of bore H₄ (more accurate as DIN).
- Includes:** Special clamping screw (with ball head) and set screw.
- Accessories:** See page 132.



Balanced
G 6,3 at 8.000^{mm/s}

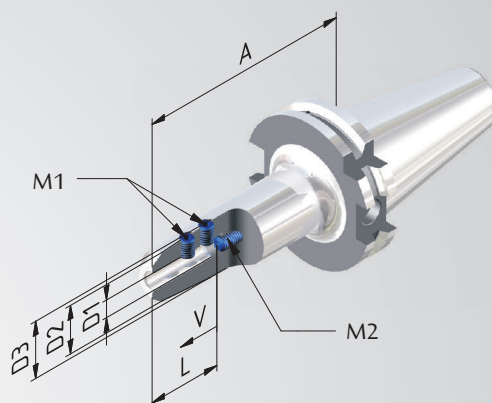

Order No.	SK	D1	A	D2	D3	L	M1	M2
			= 100					
714027-01	40	6	100	13	24	36,5	M6	M5
714027-03	40	8	100	15	26	36,5	M6	M6
714027-05	40	10	100	16	28	40,5	M6	M8x1
714027-07	40	12	100	17	29	45,5	M6	M10x1
714027-09	40	14	100	19	32	45,5	M8	M10x1
714027-11	40	16	100	21	34	48,5	M8	M12x1
714027-13	40	18	100	23	36	48,5	M8	M12x1
714027-15	40	20	100	25	38	50,5	M8	M16x1