

Extended slim shrink fit holder

Application: For clamping tools with cylindrical shank of solid carbide or HSS, tol. h6.


Technical Design: Made of special heat resistant steel. Suitable for inductive shrinking unit. Runout of outer taper to $D_1 \leq 0,003$ mm.

Includes: Set screw.

Accessories: See page 133.



Fine balanced
 $G 2,5$ at 25.000^{min-1}
or max. residual imbalance
 ≤ 1 gmm

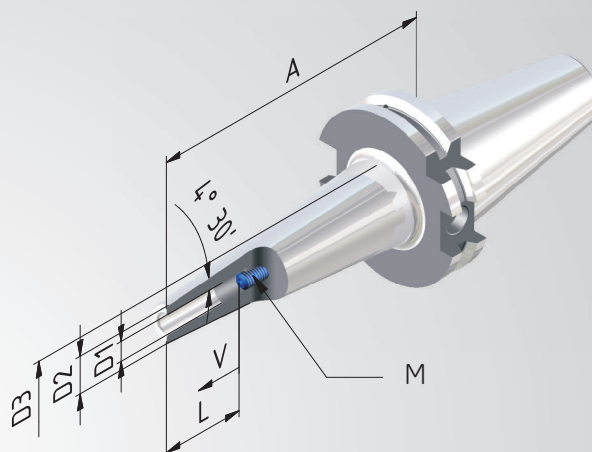

Order No.	SK	D1	A	D2	D3	V	L	M
			= 120					
714021-413	40	3	120	9	25	-	-	-
714021-414	40	4	120	9	25	-	-	-
714021-415	40	5	120	9	25	-	-	-
714021-41	40	6	120	15	30	10	37	M5
714021-42	40	8	120	15	30	10	37	M6
714021-43	40	10	120	18	32	10	42	M8x1
714021-44	40	12	120	18	32	10	48	M10x1

Version »Cool Tool«

7140219-41	40	6	120	15	31	10	37	M5
7140219-42	40	8	120	16	32	10	37	M6
7140219-43	40	10	120	18	34	10	42	M8x1
7140219-44	40	12	120	20	36	10	48	M10x1

