



Shrink fit holder 3°

Application: For clamping tools with cylindrical shank of solid carbide or HSS, tol. h6.

Technical Design: Made of special heat resistant steel. Suitable for inductive shrinking unit. Runout of outer taper to $D_1 \leq 0,003$ mm.



Fine balanced
 $G_{2,5}$ at 25.000^{min-1}
or max. residual imbalance
 ≤ 1 gmm

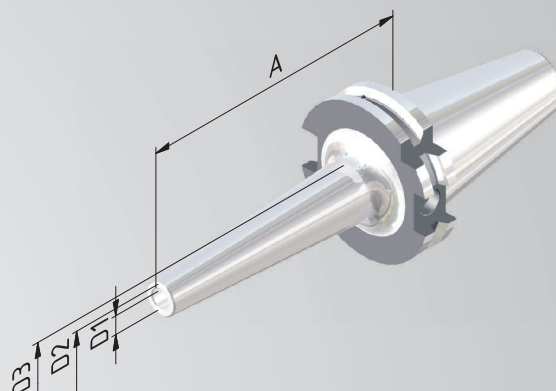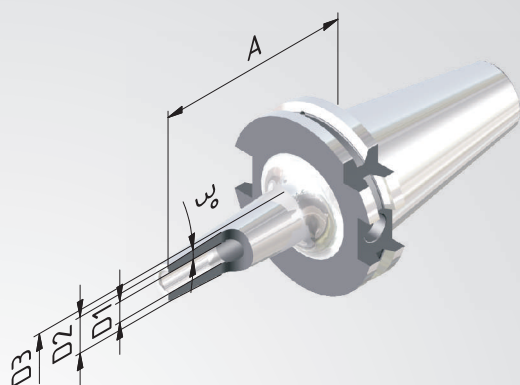

Order No.	SK	D1	A	D2	D3
= 80					
714051-13	40	3	80	9	14
714051-14	40	4	80	10	15
714051-15	40	5	80	11	16
714051-01	40	6	80	12	19
714051-02	40	8	80	14	21
714051-03	40	10	80	16	23
714051-04	40	12	80	18	25
= 120					
714051-313	40	3	120	9	18
714051-314	40	4	120	10	19
714051-315	40	5	120	11	20
714051-31	40	6	120	12	23
714051-32	40	8	120	14	25
714051-33	40	10	120	16	27
714051-34	40	12	120	18	29