

Thread shank adapter

Application: For clamping threaded shank end mill bodies.

Technical Design: Runout of outer taper to $D_1 \leq 0,005$ mm.



Fine balanced
 $G_{2,5}$ at $25.000^{min.}$
or max. residual imbalance
 ≤ 1 gmm

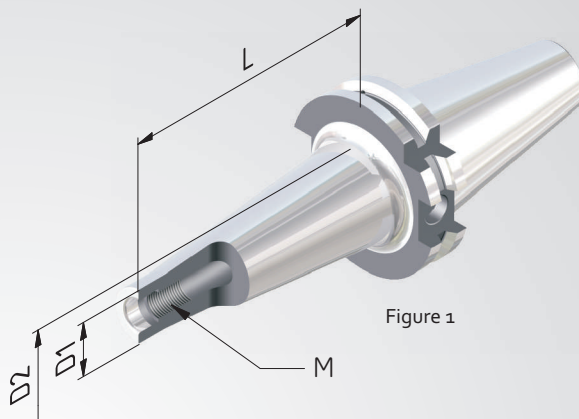


Figure 1

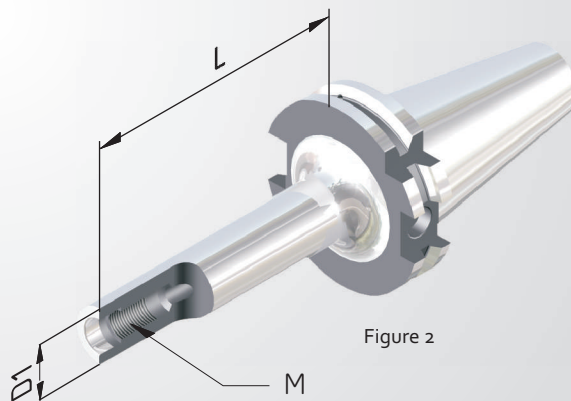


Figure 2

Order No. SK M L D1 D2
Conical (Figure 1)

714008-01	40	M8	25	13	15
714008-02	40	M8	50	13	23
714008-03	40	M8	75	13	25
714010-01	40	M10	25	18	23
714010-02	40	M10	50	18	25
714010-03	40	M10	75	18	30
714010-04	40	M10	100	18	35
714010-06	40	M10	150	18	45
714012-01	40	M12	25	21	24
714012-02	40	M12	50	21	30
714012-03	40	M12	75	21	35
714012-04	40	M12	100	21	38
714012-06	40	M12	150	21	48
714016-01	40	M16	25	29	29
714016-02	40	M16	50	29	34
714016-03	40	M16	75	29	35
714016-04	40	M16	100	29	40
714016-06	40	M16	150	29	48

Cylindrical (Figure 2)

7140057-01	40	M5	25	10	
7140057-01	40	M6	25	10	
7140087-01	40	M8	25	13	
7140087-02	40	M8	50	13	
7140087-03	40	M8	75	13	
7140107-01	40	M10	25	18	
7140107-02	40	M10	50	18	
7140107-03	40	M10	75	18	
7140107-04	40	M10	100	18	
7140107-06	40	M10	150	18	
7140127-01	40	M12	25	21	
7140127-02	40	M12	50	21	
7140127-03	40	M12	75	21	
7140127-04	40	M12	100	21	
7140127-06	40	M12	150	21	
7140167-01	40	M16	25	29	
7140167-02	40	M16	50	29	
7140167-03	40	M16	75	29	
7140167-04	40	M16	100	29	
7140167-06	40	M16	150	29	